


CITIZEN SOLAR
solarising the nation

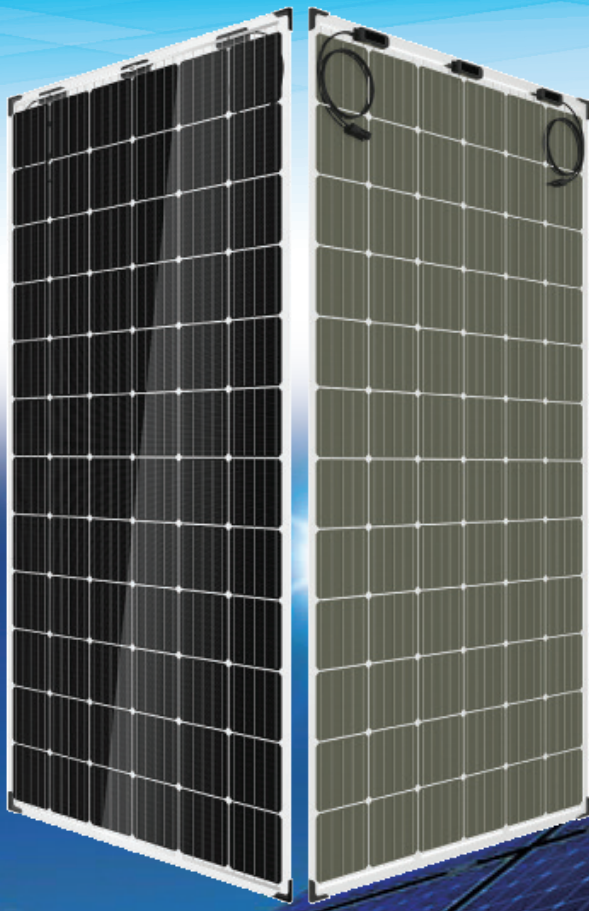

**CSPL DUAL BIPV
72 CELL SERIES 360-375 Watt
MONO CRYSTALLINE BIPV MODULE**

ISO 9001:2015, ISO 14001:2015,
OHSAS18001:2007 Certified Company

Key Features




PID Free
The possibility of PID effect generation is greatly reduced by unique frameless design.



Improved Durability and Reliability:
Dual glass reduces micro-cracking, snail trails, corrosions caused by moisture, sand, salt mist, acid, alkali, etc. The optional Solar Super Shell Tape designed for dual glass module edge sealing helps prevent water vapor from entering the module and improve the reliability significantly.



Less Maintenance Requirement:
Reduced soiling and snow coverage requires less maintenance and enhances fire safety



Strengthened Mechanical Support:
5400 Pa snow load, 2400 Pa wind load




Aesthetically Pleasing Design:
White encapsulation material maximizes module efficiency. up to 19.2% Transparent EVA increases light transmission, ideal for installations requiring light to pass through



Higher Lifetime Power Yield:
0.7 to 0.8% annual power degradation
25 year linear power warranty


LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty
0.7 to 0.8% Annual Degradation Over 25 years

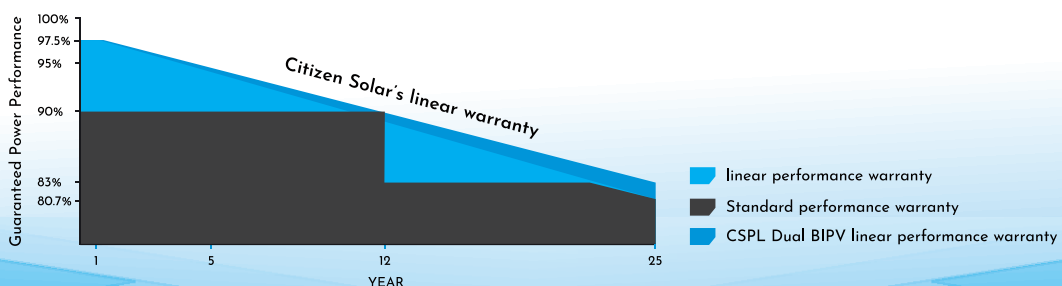


Electrical Performance & Temperature Dependence


Current-Voltage Curve CSPL-360W

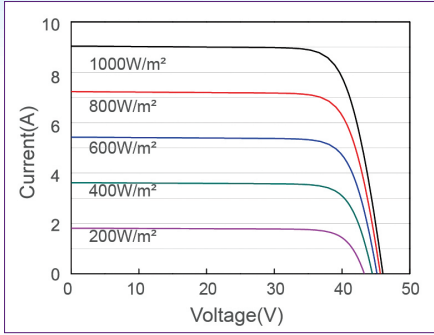

Power-Voltage Curve CSPL-360W

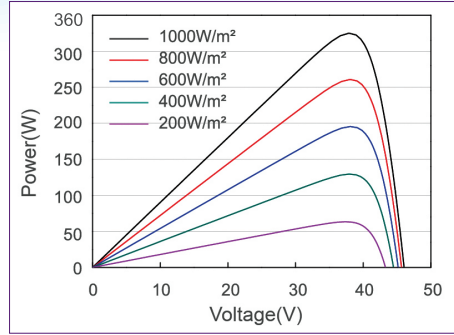

Engineering Drawing

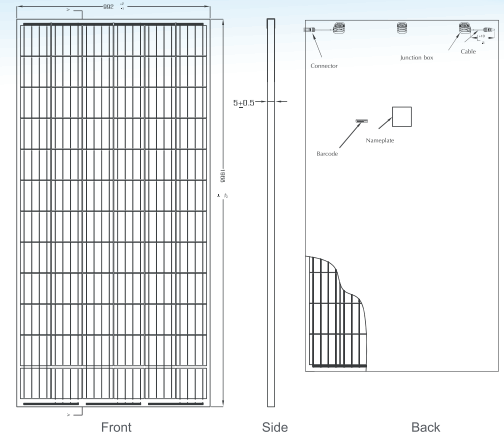

Mechanical Characteristics

Cell Type	Poly/Mono crystalline 156.75x156.75mm
No. of cells	72 (6x12)
Dimensions	1968x992x5mm (77.48x39.05x0.20 inch, 2.0mm Glass)
Weight	27.5kg
Front Glass	2.0mm High transmission, Anti-Reflection coating, semi-tempered glass
Back Glass	2.0mm Semi-tempered glass
Junction Box	IP67/68 Rated
Output Cables	TUV 1x4.0mm

SPECIFICATIONS

Module Type	CSPL360		CSPL365		CSPL370		CSPL375	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Maximum Power(Pmax) [W]	360W	266	365W	270	370W	274	375W	278
Open Circuit Voltage(Voc) [V]	47.90	44.10	48.18	44.41	48.43	44.63	48.72	44.88
Maximum Power Voltage(Vmp) [V]	39.18	36.20	39.45	36.40	39.70	36.65	39.98	36.88
Short Circuit Current(Isc) [A]	9.65	7.76	9.72	7.81	9.78	7.86	9.84	7.92
Maximum Power Current(Imp) [A]	9.19	7.36	9.26	7.42	9.32	7.47	9.38	7.52
Module Efficiency STC (%)	18.4		18.5		19		19.2	
Operating Temperature (°C)	-40°C~+85°C							
Maximum System Voltage	1000VDC							
Maximum Series Fuse Rating	15AMP							
Power Tolerance	0~±3W							
Temperature Coefficient of Pmax	+0.059%/°C							
Temperature Coefficient of Voc	-0.300%/°C							
Temperature Coefficient of Isc	-0.380%/°C							
Nominal Operating Cell Temperature (NOCT)	45±2°C							

STC :  Irradiance 1000W/m²

 Cell Temperature 25°C

 AM=1.5

NOCT :  Irradiance 800W/m²

 Cell Temperature 20°C

 AM=1.5

 Wind speed 1 m/s

Remark: READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT. • Specification included in this datasheet are subject to change without notice. Electrical data without guarantee. Please Confirm your exact requirement with the company representative while placing your order.

Power measurement tolerance : ± 3%

Corporate Office: 711, Sakar-2, Ellisbridge Corner, Ashram Road, Ahmedabad-380006
Customer Care No : 8000111222 | **Email :** info@citizensolar.com
Manufacturing : New Survey No.966, Village: Indrad, Chhatral Kadi Road, Ta. Kadi,
Unit Dist. Mehsana, Gujarat-382715 | **WEB :** www.citizensolar.com

